

FLUTEGLASS ACRYLIC





We at **BOMBAY DECORATIVE** are engaged in delivering innovative and designer products and imported decorative products from Thailand, Europe, china and Malaysia.

• Completely concentrate on the ideas reinvigorate rooms and use the material in a new way. Use time and space to break old notions and get in touch with new concepts.

• Reinvent spaces and develop a new room experience.

• We are happy to offer you the freedom to design spaces according to your ideas with our design, texture and material combinations.




APPLICATION

Available in Size

2440mm X 1220mm (8ft X 4ft)

Thickness : same as sample use in brochure



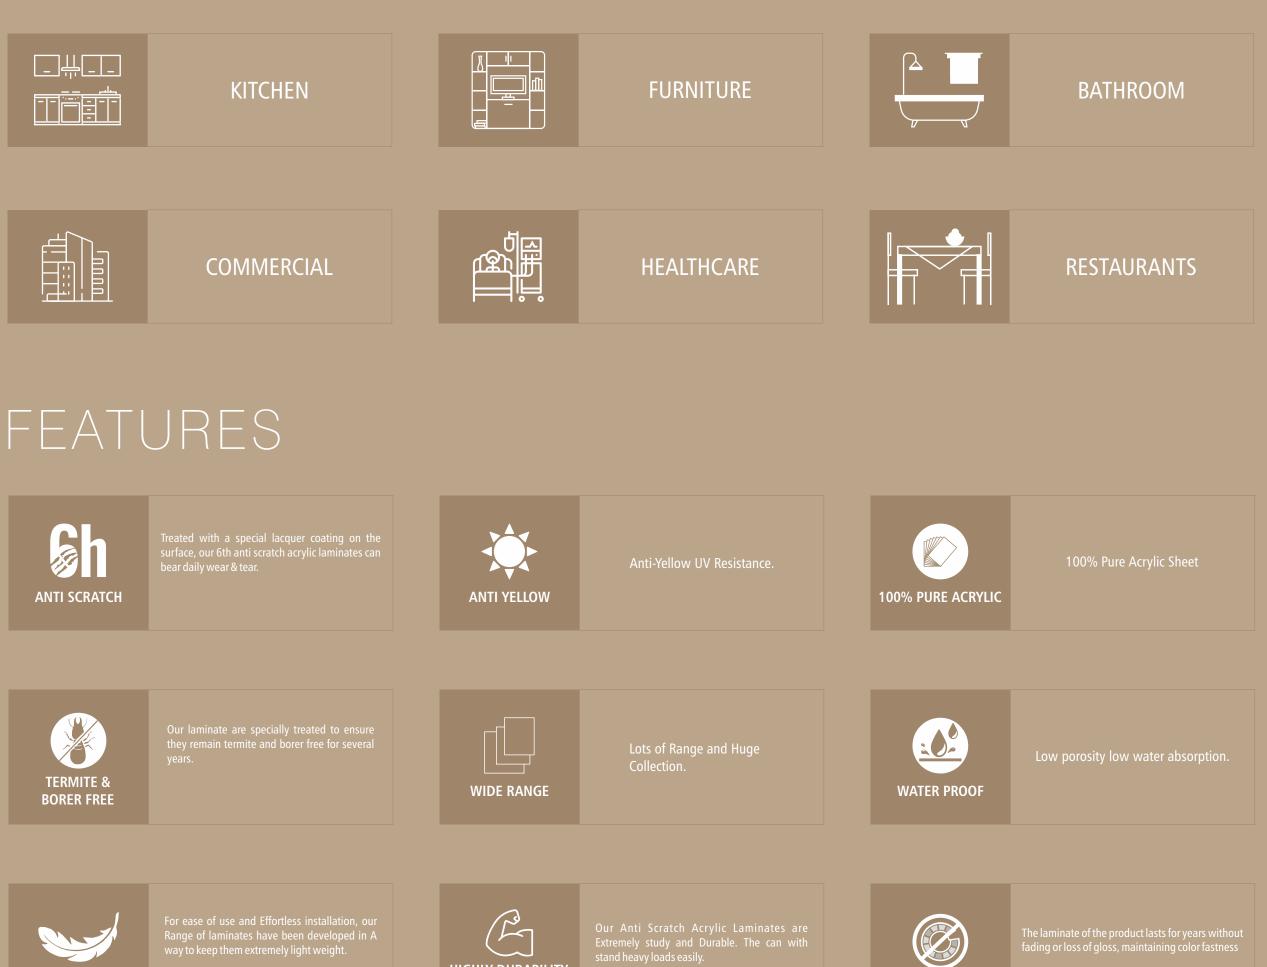

LIGHT WEIGHT

HIGHLY DURABILITY & STRENGTH

COLOUR FASTENING










8ft X 4ft X 3mm

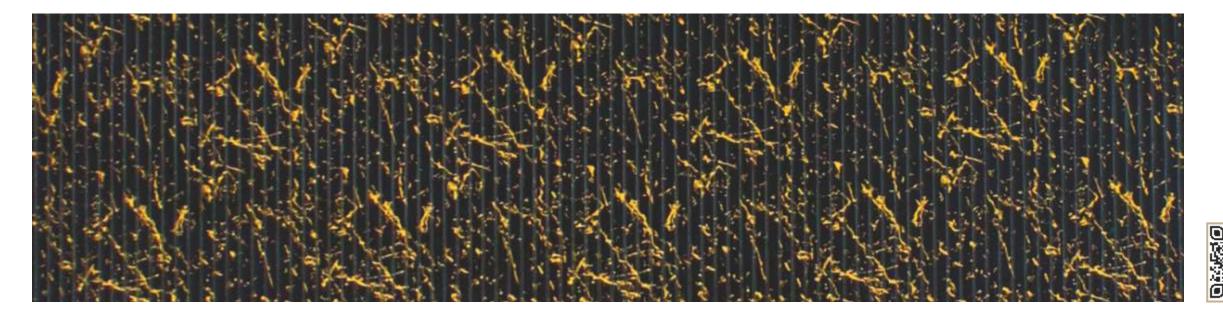

7602

8ft X 4ft X 3mm



Scan **QR** Code For Full Sheet V

an QR

can **QR** Code or Full Sheet View




8ft X 4ft X 3mm

rm (4ft x 8 ft)

Sheet Size: 1220





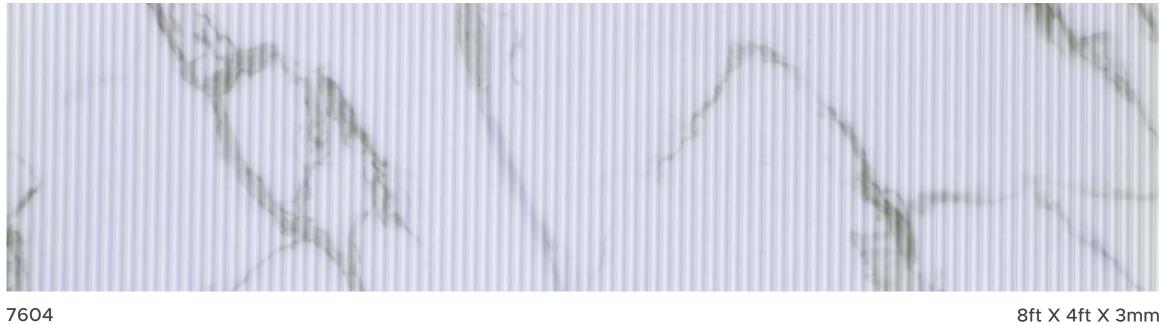






can QR Co

MARBLE

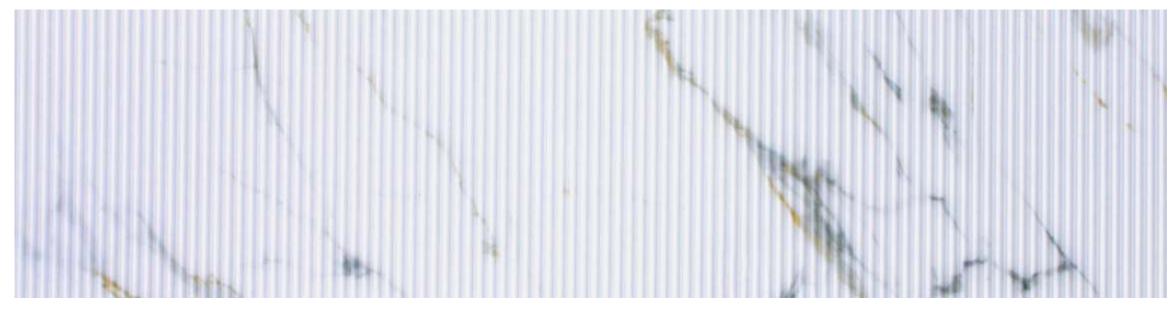

7605

8ft X 4ft X 3mm

8ft X 4ft X 3mm








8ft X 4ft X 3mm

FLUTEGLASS ACRYLIC



SPARKLE & SOLID



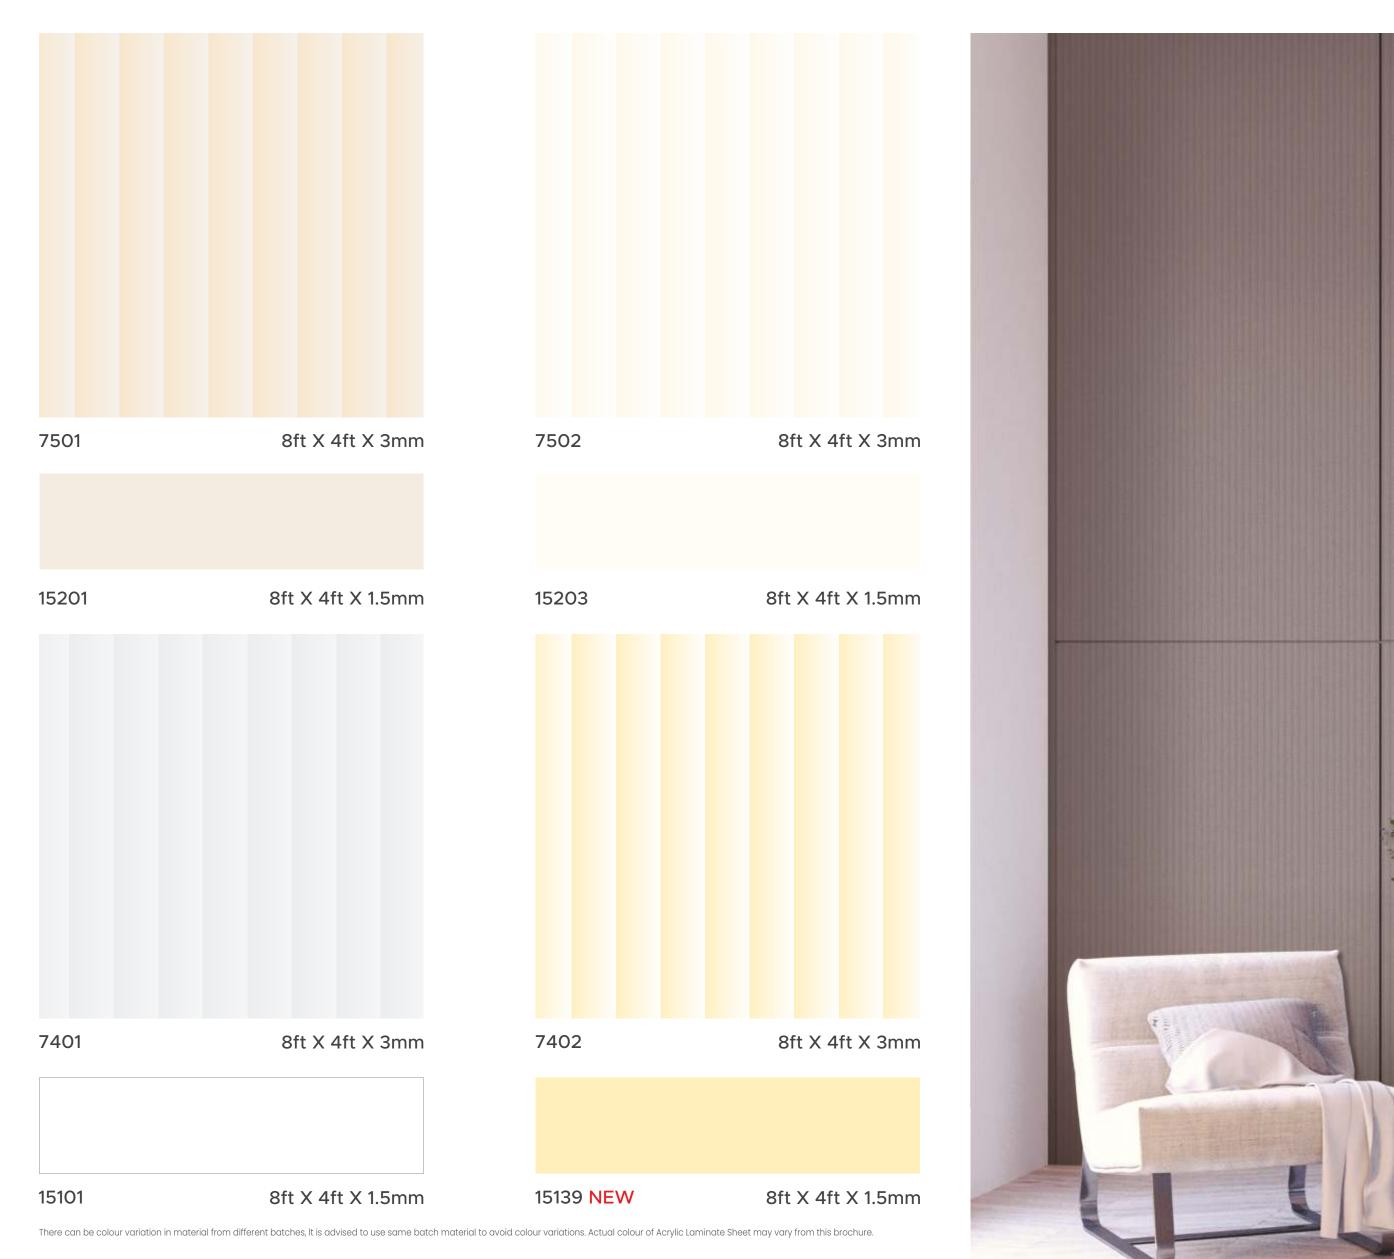

FLUTEGLASS A C R Y L I C



15109











BOMBAY DECORATIV

ТМ



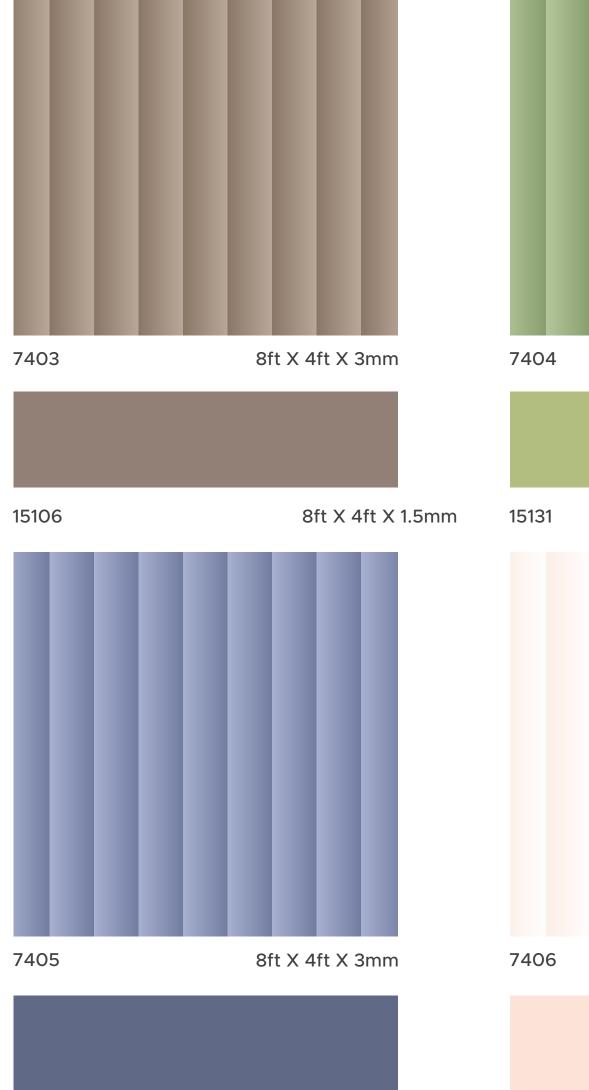

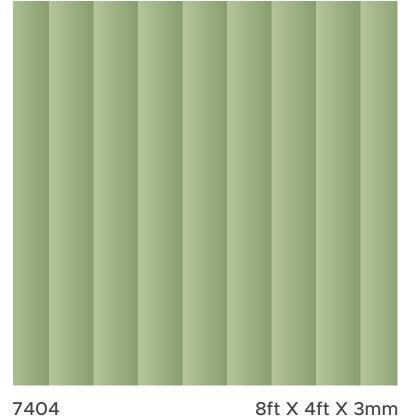





8ft X 4ft X 1.5mm


There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations. Actual colour of Acrylic Laminate Sheet may vary from this brochure.

15141 NEW

8ft X 4ft X 1.5mm

でいた X C. Martin Jul 1 HK M 14 Contraction of the いいれないないため、読むのいろう ないい やいいれないないない ひとうろう 読むのいろ 三十七日二人にあたいし 「いいい」とない、 A 「おいろはなくないという」というた 「「「「「「「「「「「「「「「」」」」」 モンしょ 12.00 「小い」 21-12 2 1 4 4 10-1-1-「たいのかのないないない * * ... 「小学校」に「「小学校」」 1 1 1 「ないいになん」ない 1.1 -8 4 1.7 1 ない、安 No. 1.6. 5.1 1 in the second * Lan IV 1. A Part 1 the l S Strange & жè 日間を保い日に行いる ALL AL A 1 The state of the s 1 + + 1 21.2 1 2 No. 4 -----「二人」



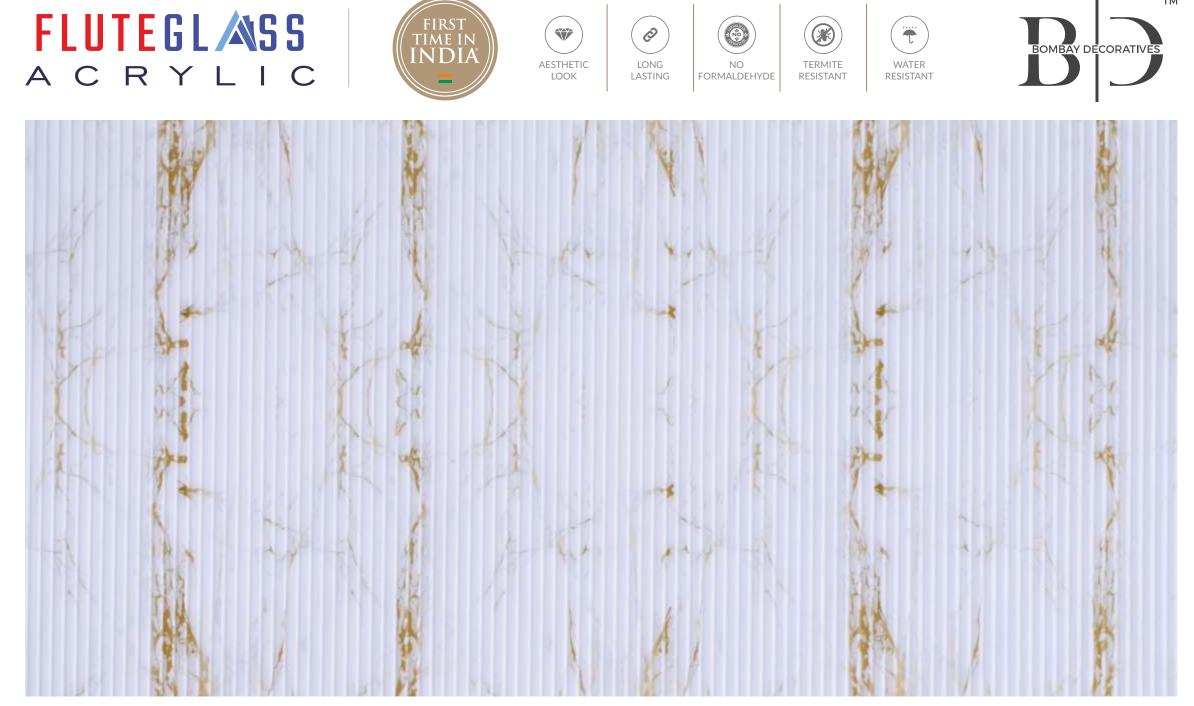

Ø

first fime i NDI



can QR (

ТΜ

BOMBAY DECORATIVES

T

X



QР








MAR B L E

7303

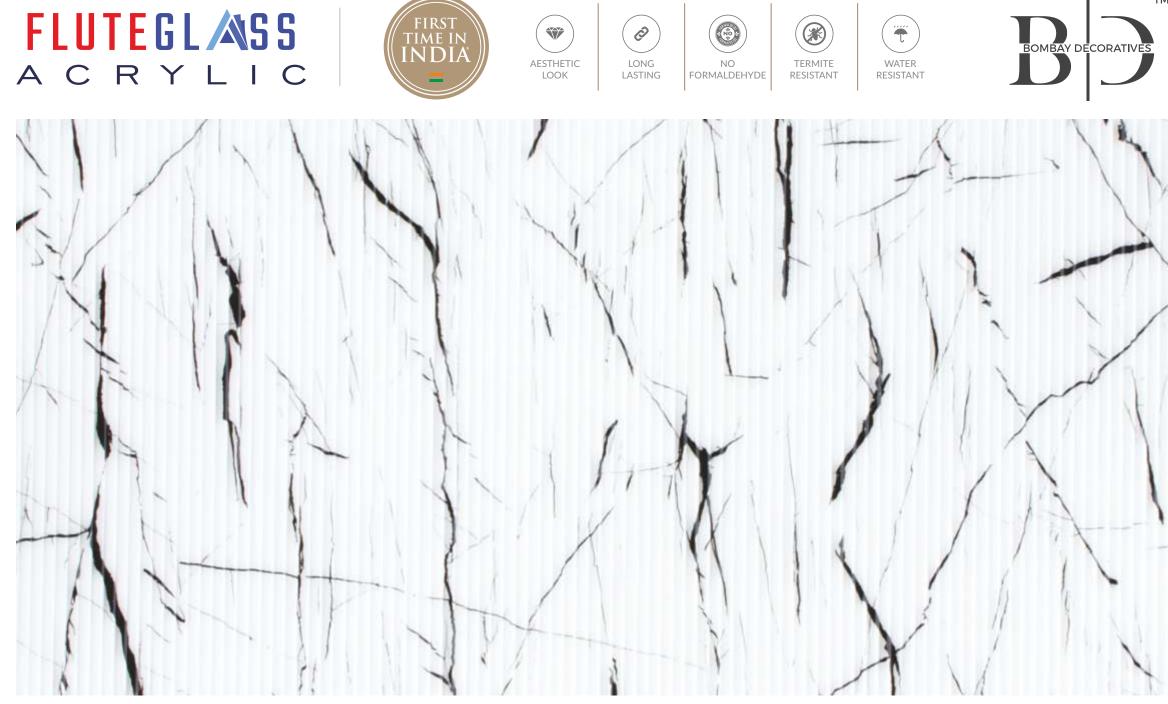



de et View


OR Co

O.

Ю

ΤМ



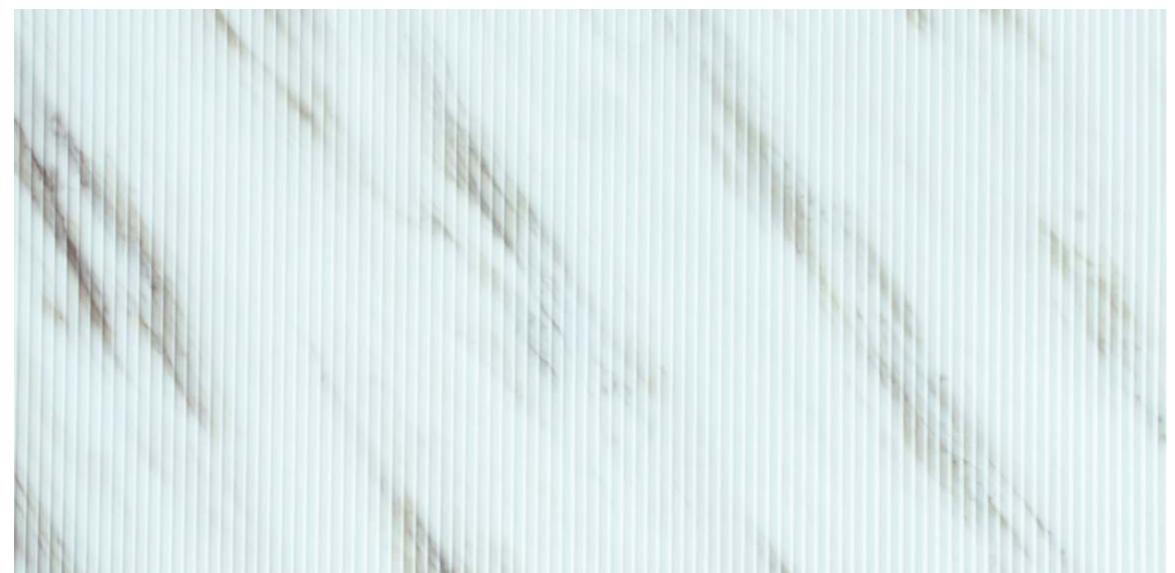






SPARKLE & SOLID



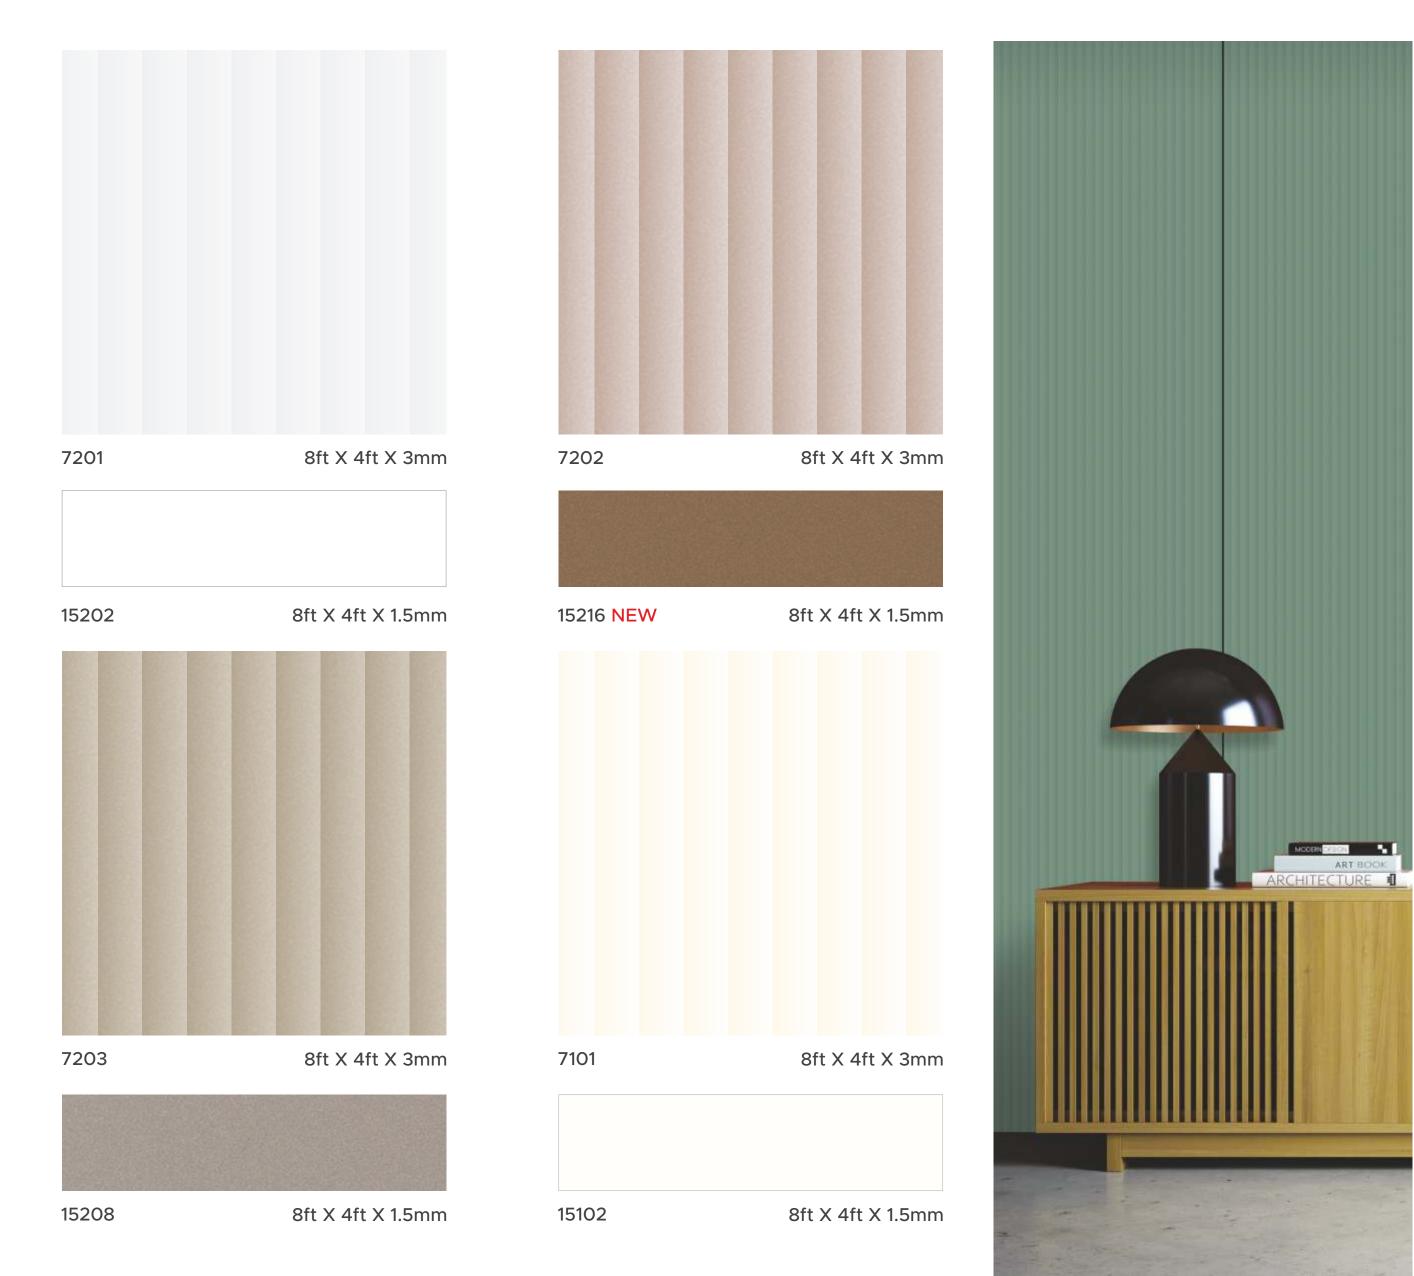
















ТМ

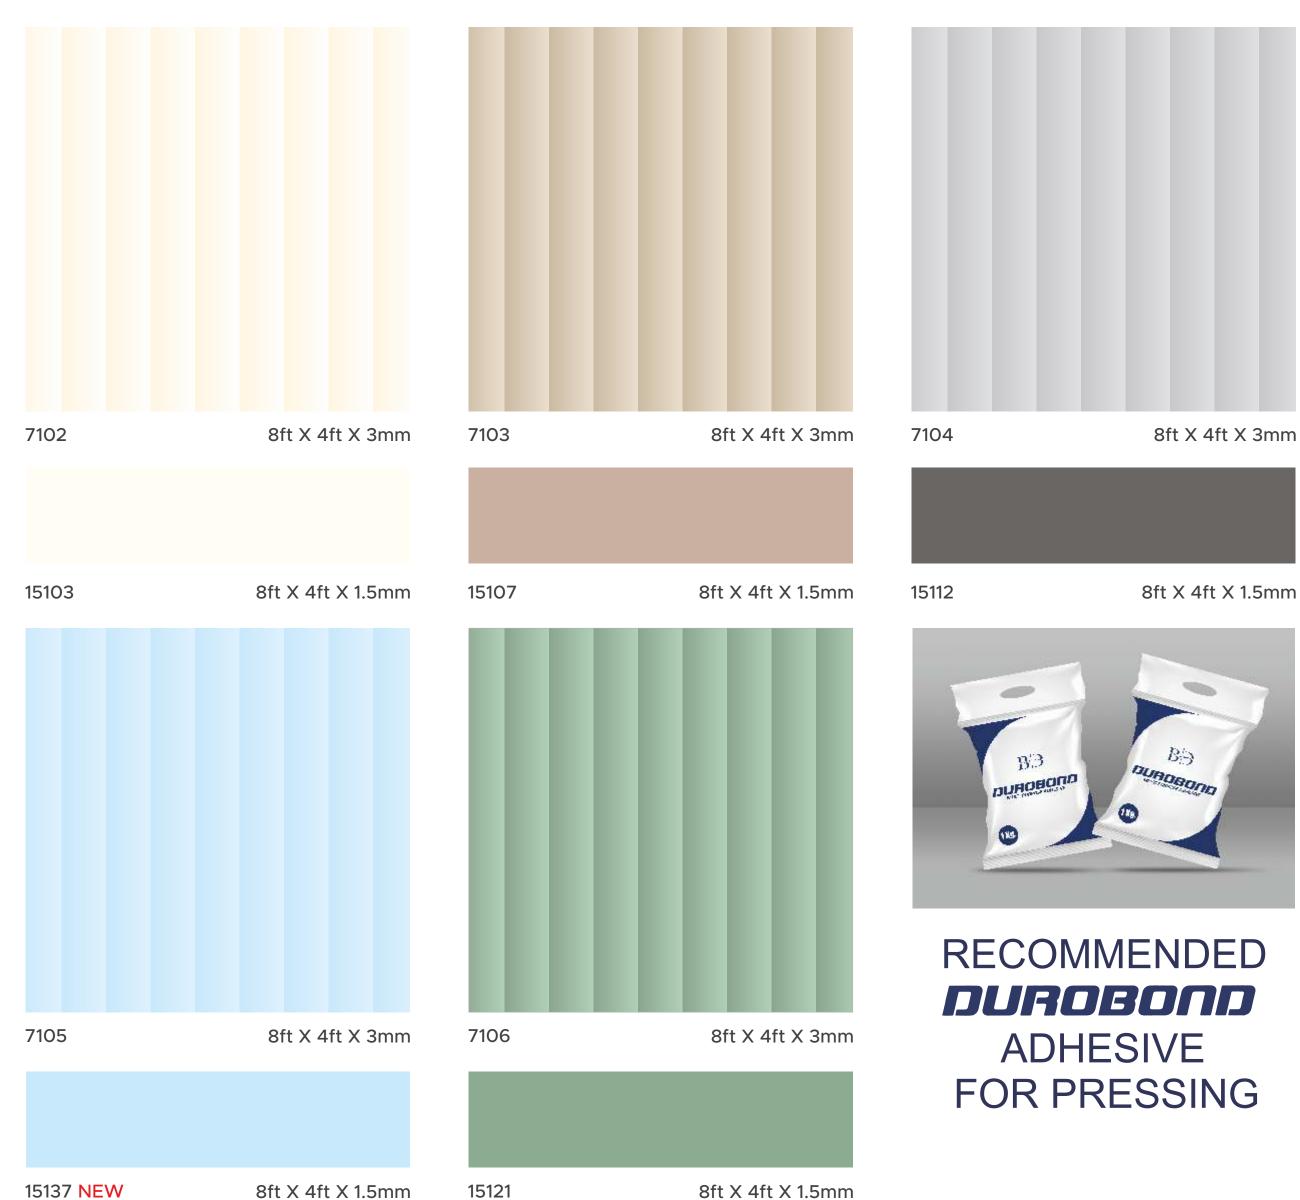


15137 NEW

| Parameters | Bombay Decoratives Acrylic Laminate | High Gloss Laminate Mica | PU Coating / Duco Paint | Back Painted Glass |
|--------------------------------------|--|-----------------------------|----------------------------|---------------------------|
| Gloss Level | >90 | >70 | >85 | >85 |
| Scratch Proof | 6H Antisractch | No | No | No |
| Color Consistency | Excellent | Not Good | Not Good | Not Good |
| Orange Peel | No | Yes | Yes | No |
| UV Resistance | Excellent | Bad | Bad | Bad |
| Water Resistance | Excellent | Bad | Bad | Excellent |
| DRY Heat Resistance | Excellent | Good | Bad | Bad |
| Volatile Organic Compounds (VOCs) | No | Yes | Yes | Yes |

PANEL STRUCTURE



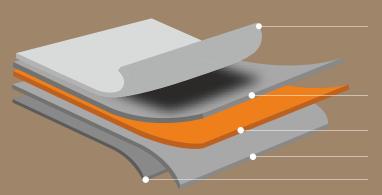

6H Antiscratch Coating

Acrylic Layer

Glue Line **PVC Based Film Layer Primer Coating**

LIMITED WARRANTY

BOMBAY DECORATIVES Products are tested to be reasonably free of defects, and when used and fabricated properly they will comply with the applicable manufacturing specifications within realistic deviations. we recommend customers to insect properly before installing. **BOMBAY DECORATIVES** warranty in on way covers defects and non-compliance from or otherwise attributable ti any other causes, including without limitation the following:

Improper handling / transportation / storage of BOMBAY DECORATIVES Unauthorized alteration to the products Outdoor applications

- Improper installation of BOMBAY DECORATIVES
- Improper or unintended usage of BOMBAY DECORATIVES
- Lack of or improper maintenance of **BOMBAY DECORATIVES**
- Exposure to high temperatures

- There will be no guarantee or exchange under any circumstances
- Color variations in products from different batches are possible
- We recommend using products from same batch to avoid color variations
- This brochure is for presentation purposes only. Actual colors may differ.

REASONS FOR AIR BUBBLE FORMATIONS ON ACRYLIC SHEETS





Acrylic are bonded in extremely humid conditions



Debonding in certain areas because of uneven substrate surface



Use of water base synthetic resin adhesive any other the PEVA (Polyethylene Vinyl Acetate Co-polymer)



Insufficient or lack of pressing during the bonding period



When substrate loses moisture after installation



Use of extremely large acrylic/PVC laminate sheets (more than 8 ft x 2 ft long)

To avoid de lamination / air bubbles in between ply and laminate the above steps should be taken care of. Bonding of acrylic sheets shouldn't be completed under high humidity



DISCLAIMER

- Do not use plywood with high moisture content
- Do not use ply with uneven surface
- Avoid using inferior quality adhesive
- Apply sufficient pressure
- We do not recommend pasting of sheets on the printed/branding area of the plywood



RECOMMENDED DIROBOND ADHESIVE FOR PRESSING

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colour of the Acrylic sheet may vary from this brochure.

